


SG-54TW4D
500-520W

N-type TOPCon Solar Single-glass Module
Maximum Efficiency 23.4%

Quality Certification



Product Warranty

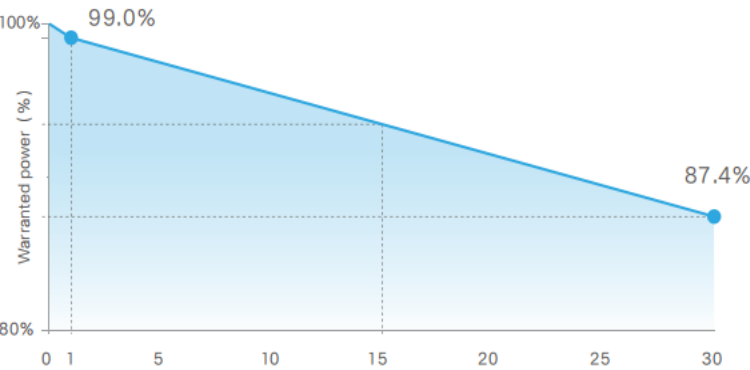

25 Year
Warranty for Materials and Processing

30 Year
Warranty for Extra Linear Power Output

First Year Power Degradation<1%

Year 2-30 Power Degradation<0.4%

Power warranty applies at STC condition or only applies to the front side of the module

Product Performance

Higher Efficiency
Excellent MBB technology and leading process technology, conversion efficiency up to 23.4%

Smaller Size
A lightweighted design for convenient transportation and installation


Lower LCOE
Effectively reduce system BOS costs and shorten the return on investment cycle

Superior Temperature Coefficient
Generating 1%-2% more power than P-type modules in high temperature regions

Non-destructive Laser Cutting Technology
Achieving better cell strength, lower micro-cracks risk for better product reliability

Superior Mechanical Load Capacity
Heavy snow load up to 5400 Pa
wind load up to 2400 Pa

Engineering Drawings

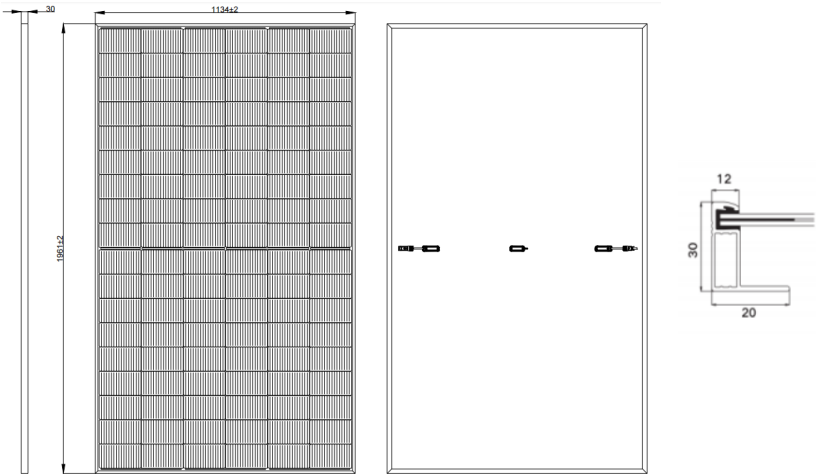

Tolerance: Length: ±2mm Width: ±2mm

Electrical Characteristics

Module Type	SG-54TW4D-500	SG-54TW4D-505	SG-54TW4D-510	SG-54TW4D-515	SG-54TW4D-520
Maximum Power Pmax (W)	500	505	510	515	520
Voltage at Maximum Power (Vmp/V)	33.37	33.57	33.77	33.97	34.17
Current at Maximum Power (Imp/A)	14.99	15.05	15.11	15.17	15.23
Open Circuit Voltage (Voc/V)	39.98	40.18	40.38	40.58	40.78
Short Circuit Current (Isc/A)	15.94	16.00	16.06	16.12	16.18
Module Efficiency (%)	22.5	22.7	22.9	23.2	23.4
Pmax/Voc/Isc Tolerance	±3%		Maximum System Voltage	DC1500V	
Maximum Series Fuse Rating	30A		Operating Temperature	-40°C~+70°C	
Fire Rating	Class C		Power Sorting Tolerance	0~+5W	


STC: Irradiance 1000W/m², Cell Temperature 25°C, AM=1.5

Mechanical Characteristics

Cell Type	N- type mono-crystalline
Cell Orientation	108 (2 x 54)
Dimension	1961 x 1134 x 30mm
Weight	22.3kg
Glass	Single glass,3.2mm coated tempered glass
Frame	Composite material
Junction Box	IP68 rated
Output Cables	4mm², (+): 1200mm, (-): 1200mm or customized length
Connector Type	Z4S-abcd(Zerun)/PV-ZH202B(Zhonghuan)/PV-HT03x(x=0,1 or 2)(Haitian)/PV-KST4-EV02A/xy, PV-KBT4-EV02A/xy(Staubli)
Mechanical Load	+5400Pa (Front side) /-2400Pa (Rear side)

I-V and P-V Curves

Temperature: (25 ± 2) °C

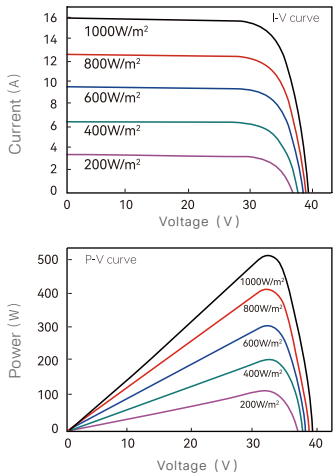

Temperature Characteristics

Temperature Coefficients of Pmax	-0.30%/°C
Temperature Coefficients of Voc	-0.25%/°C
Temperature Coefficients of Isc	0.046%/°C
Temperature Rating [T98]max	70°C

Packaging Configuration

Pallet Dimension	1991 x 1120 x 1250 mm
Packing Detail	36 pcs/pallets, 72 pcs/stack, 864 pcs/ 40'HQ container